

STONES REQUIRED:

87 stones required to complete this project

12-L x 8-W x 4-H in (approx.) 305-L x 203-W x 102-H mm



INSTALLATION GUIDELINES:

Suggested tools: Safety glasses, gloves, tape measure, level, rubber mallet, shovel, wheelbarrow, hand tamper (or plate compactor), circular saw with concrete masonry blade and class A gravel.

Base Preparation. Dig an area that is 6" larger on all sides than your project and at least 8" deep. Compact class 'A' gravel in the area 2" at a time and fill to a depth of 6" to withstand weight of project and resist seasonal frost from below.

The First Row. Lay the first level of blocks on the completed gravel base, making sure the stones are level from side to side and front to back.

Additional Rows. Stack additional rows by staggering the stones along the post and wall panels to your desired height. Apply adhesive on each course to adhere the stones. NOTE: This wall requires cutting 6 stones where indicated ((i)) on the diagram. Using a circular saw with a concrete blade, cut the stone to a length of 8"x 8". Consult a Shaw Brick representative for more details. STAGGER EVERY OTHER ROW FOR INCREASED STABILITY.



Natural Charcoal







Autumn Blend Chamois Charcoal

Mocha Charcoal

FRONT VIEW



STONES REQUIRED:

- Left post = 24 stones
- Left post cap = 6 stones
- Right post = 24 stones
- Right post cap = 6 stones
- Wall Rows (1 to 5 = 27 stones):

ROW 1	5 stones
ROW 2	3 stones; PLUS 3 cut stone 8" long where indicated ①
ROW 3	5 stones
ROW 4	3 stones; PLUS 3 cut stone 8" long where indicated ①
ROW 5	5 stones


BIRDS EYE VIEW

BIRDS EYE VIEW

POST &

POST CAP








BIRDS EYE VIEW POST 6 ROWS X 4 STONES

20"



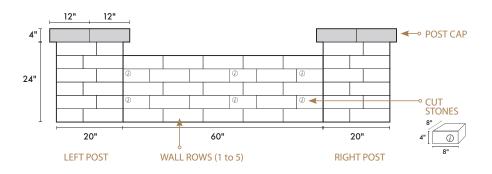

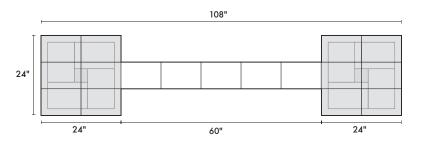



BIRDS EYE VIEW POST CAP 1 ROW X 6 STONES

