

CONCRETE MASONRY UNITS*





	STRETCHERS	100% SOLID**	SPLITABLE	HALF HEIGHT	KNOCK OUT BOND BEAM	SEMI-SOLID	JAMBS	CHANNEL BOND BEAMS	BULLNOSE	CENTRE SCORE	SERVICE UTILITY BLOCK
SERIES 100	100mm Stretcher 90W x 190H x 390L - mm 	100mm Solid 90W x 190H x 390L - mm 	100mm Splitable 90W x 190H x 390L - mm 						100mm Bullnose Units 90W x 190H x 390L - mm 		
SERIES 150	150mm Stretcher 140W x 190H x 390L - mm 	150mm Solid 140W x 190H x 390L - mm 	150mm Splitable 140W x 190H x 390L - mm 	150mm Half Height 140W x 90H x 390L - mm 	150mm Knock Out Bond Beam 140W x 190H x 390L - mm 	150mm Semi-Solid 140W x 190H x 390L - mm 	150mm Jamb 140W x 190H x 390L - mm 	150mm Bond Beam 140W x 190H x 390L - mm 	150mm Bullnose Units 140W x 190H x 390L - mm 	150mm Centre Score 140W x 190H x 390L - mm 	150mm Service Utility Block 140W x 190H x 390L - mm
SERIES 200	200mm Stretcher 190W x 190H x 390L - mm 	200mm Solid 190W x 190H x 390L - mm 	200mm Splitable 190W x 190H x 390L - mm 	200mm Half Height 190W x 90H x 390L - mm 	200mm Knock Out Bond Beam 190W x 190H x 390L - mm 	200mm Semi-Solid 190W x 190H x 390L - mm 	200mm Jamb 190W x 190H x 390L - mm 	200mm Bond Beam 190W x 190H x 390L - mm 	200mm Bullnose Units 190W x 190H x 390L - mm 	200mm Centre Score 190W x 190H x 390L - mm 	200mm Service Utility Block 190W x 190H x 390L - mm
SERIES 250	250mm Stretcher 240W x 190H x 390L - mm 		250mm Splitable 240W x 190H x 390L - mm 		250mm Knock Out Bond Beam 240W x 190H x 390L - mm 	250mm Semi-Solid 240W x 190H x 390L - mm 	250mm Jamb 240W x 190H x 390L - mm 	250mm Bond Beam 240W x 190H x 390L - mm 	250mm Bullnose Units 240W x 190H x 390L - mm 		
SERIES 300	300mm Stretcher 290W x 190H x 390L - mm 		300mm Splitable 290W x 190H x 390L - mm 			300mm Semi-Solid 290W x 190H x 390L - mm 	300mm Jamb 290W x 190H x 390L - mm 	300mm Bond Beam 290W x 190H x 390L - mm 			

* Other Masonry Units available through Special Order. Please contact Shaw Brick for more details.

** 100% Solid Masonry Units also available in 75mm and 50mm widths

SERIES 200 DIMENSION EXAMPLE

All dimensions in mm (Actual)
Allow 10mm for mortar joint

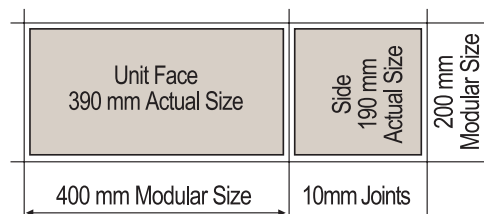

SERVICE UTILITY BLOCK. A Real Time Saver! Now a mason can easily convert the service utility block to accommodate pipes/conduits that are located within the block wall. No more sawing or cutting. The block is available in 140mm and 190mm thickness and can be used both as a utility unit as well as a stretcher. Another great product from Shaw Brick to improve on-site performance.

