

THE BERKLEY BENCH | WEATHERED WALLSTONE

PROJECT SUMMARY



68
STONES

STONES REQUIRED:
68 stones required to complete this project

BLOCK SIZE:
12-L x 8-W x 4-H in (approx.)
305-L x 203-W x 102-H mm



INSTALLATION GUIDELINES:

Suggested tools: Safety glasses, gloves, tape measure, level, rubber mallet, shovel, wheelbarrow, hand tamper (or plate compactor), and class A gravel.

Base Preparation. Dig an area that is 6" larger on all sides than your project and at least 8" deep. Compact class 'A' gravel in the area 2" at a time and fill to a depth of 6" to withstand weight of project and resist seasonal frost from below.


The First Row. Lay the first level of blocks on the compacted gravel base, making sure the stones are level from side to side and front to back. Bury half of the base block.

Additional Rows. Stack additional rows by staggering the stones throughout your project as per the diagram to your desired height. Apply adhesive on each course to adhere the stones.


FRONT VIEW

STONES REQUIRED:


- Left post = 28 stones
- Left post cap = 6 stones
- Right post = 28 stones
- Right post cap = 6 stones

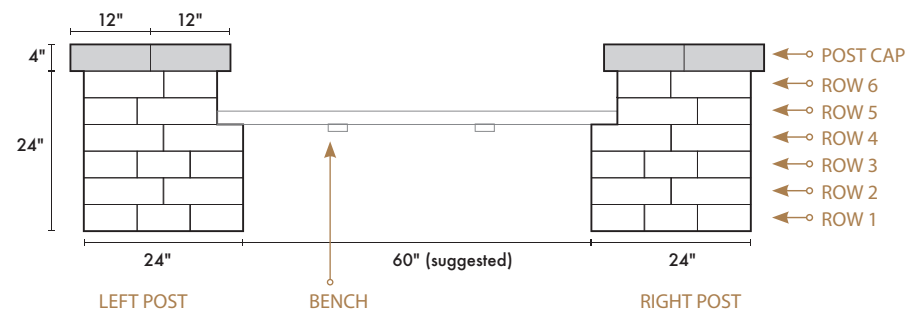

BIRDS EYE VIEW

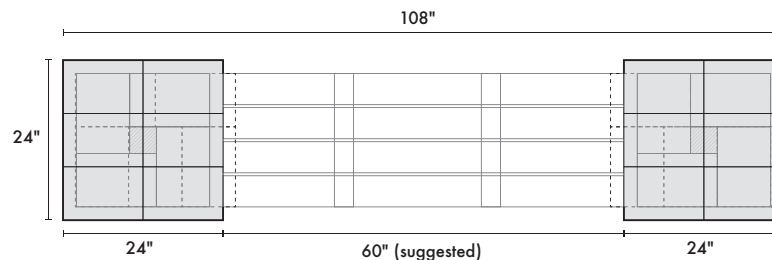

BUILDING THE ROWS

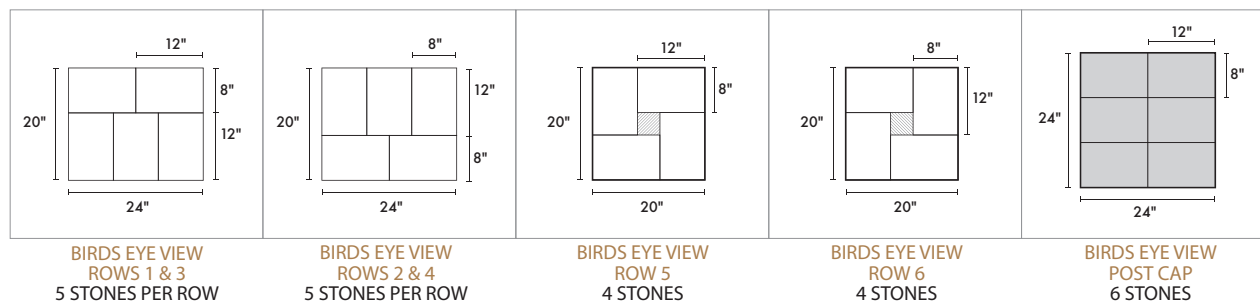

Natural Charcoal

Autumn Blend

Chamois Charcoal

Mocha Charcoal

